


These check valves provide accurate and perfect non return of fluid. The pressure drop is very small due to the full bore size.

Operating pressure	max. 460 psi min. 1,45 psi
Pressure class	300
Temperature range	max + 419°F
Medium	Steam, Nitrogen, Air, Hot and cold water
Body material	Stainless steel casting
Mounting	horizontal

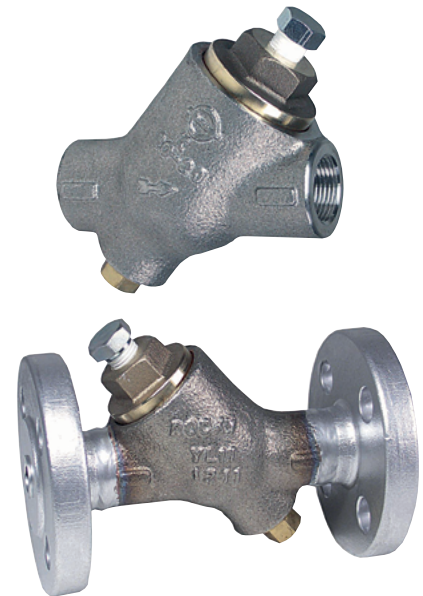

Order Code

YL - 1 2 1 * - * * * *

Series

Version

2 2/2-way

Function

1 Normally closed (NC)

Connection

1 Thread

2 Flange version

Nominal size

15 15 mm

20 20 mm

25 25 mm

32 32 mm

40 40 mm

Flange material

Y stainless steel

Type of thread / flange

N NPT thread

B* BSPT thread

P* PT thread


A ANSI flange

D* DIN flange

J* JIS flange

* Available on Request. Not a stock item.

Dimensions (mm)

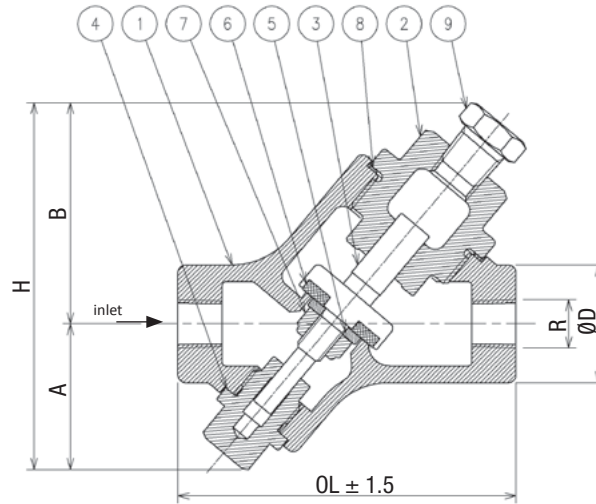

YL valve, tapped, 2/2-way, NC

Model No.	DN	R	OL	A	B	H	D	Weight (lbs)
YL-1211-15N*	15	1/2"	92	39	60	99	32	2.0
YL-1211-20N*	20	3/4"	111	46	68	114	38	3.3
YL-1211-25N*	25	1"	132	49	73	122	44	4.6
YL-1211-32N*	32	1 1/4"	145	56	82	138	55	6.2
YL-1211-40N*	40	1 1/2"	152	60	90	150	62	7.7

* Also available as version B with BSPT thread or P with PT thread. (on request, not a stock item)

Spare parts

No.	Name	Valve	YL-1211-15*	YL-1211-20*	YL-1211-25*	YL-1211-32*	YL-1211-40*
1	Body		Y-21115 - 01 *	Y-21120 - 01 *	Y-21125 - 01 *	Y-21132 - 01 *	Y-21140 - 01 *
2	Guide cover		Y-21115 - 02	Y-21120 - 02	Y-21125 - 02	Y-21132 - 02	Y-21140 - 02
3	Stem		Y-21115 - 03	Y-21120 - 03	Y-21125 - 03	Y-21132 - 03	Y-21140 - 03
4	Guide plug		Y-21115 - 04	Y-21120 - 04	Y-21125 - 04	Y-21132 - 04	Y-21140 - 04
5	Guide washer		Y-21115 - 05	Y-21120 - 05	Y-21125 - 05	Y-21132 - 05	Y-21140 - 05
6	Gasket		Y-21115 - 06	Y-21120 - 06	Y-21125 - 06	Y-21132 - 06	Y-21140 - 06
7	U-nut		Y-21115 - 07	Y-21120 - 07	Y-21125 - 07	Y-21132 - 07	Y-21140 - 07
8	Gasket		Y-21115 - 08	Y-21120 - 08	Y-21125 - 08	Y-21132 - 08	Y-21140 - 08
9	Plug		Y-21115 - 09	Y-21120 - 09	Y-21125 - 09	Y-21132 - 09	Y-21140 - 09

* please complete: N = NPT thread, B = BSPT thread, P = PT thread