


These check valves provide accurate and perfect non return of fluid. The pressure drop is very small due to the full bore size.

Operating pressure	max. 460 psi min. 1,45 psi
Pressure class	300
Temperature range	max + 419°F
Medium	Steam, Nitrogen, Air, Hot and cold water
Body material	Stainless steel casting
Mounting	horizontal

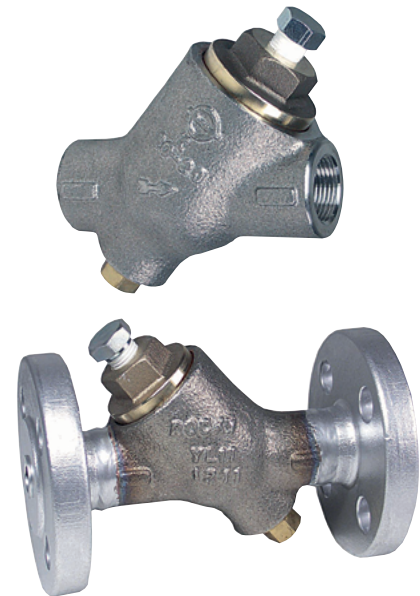

### Order Code

YL - 1 2 1 \* - \* \* \* \*

#### Series

#### Version

2 2/2-way

#### Function

1 Normally closed (NC)

#### Connection

1 Thread

2 Flange version

#### Nominal size

15 15 mm

20 20 mm

25 25 mm

32 32 mm

40 40 mm

#### Flange material

Y stainless steel

#### Type of thread / flange

N NPT thread

B\* BSPT thread

P\* PT thread


A ANSI flange

D\* DIN flange

J\* JIS flange

\* Available on Request. Not a stock item.

Dimensions (mm)

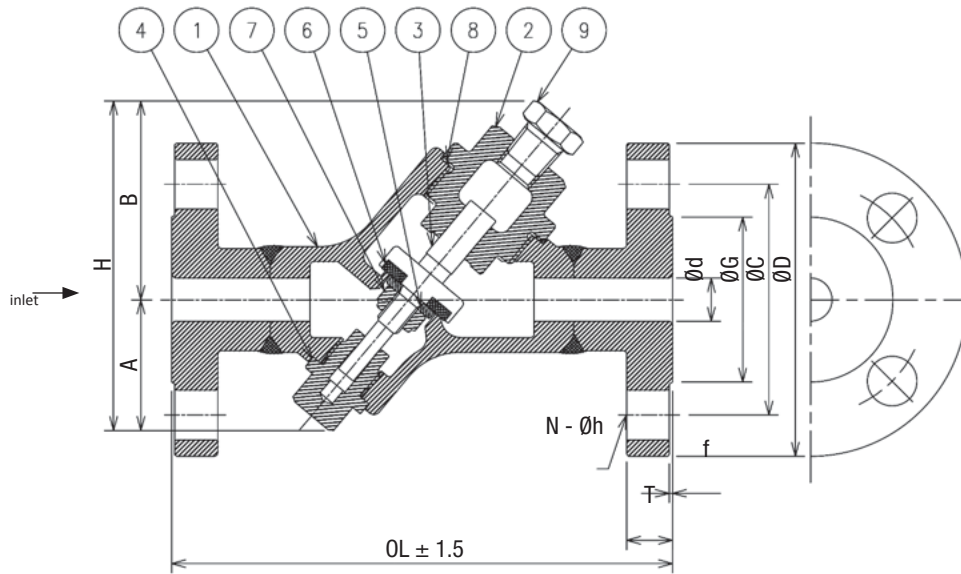

YL valve, with flange, 2/2-way, NC

Model No.	DN	d	OL	A	B	H	Weight (lbs)
YL-1212-15A*	15	13	137	38	54	92	5.3
YL-1212-20A*	20	19	177	44	65	109	7.5
YL-1212-25A*	25	25	195	49	69	118	11.0
YL-1212-32A*	32	32	218	56	79	135	14.6
YL-1212-40A*	40	40	243	60	90	150	17.0

\* Also available as version D with DIN flange or J with JIS flange. (on request, not a stock item)

Dimensions for ANSI flange

DN	D	C	G	T	f	N	h
15	95	66.5	35	14.5	1.6	4	15
20	117	82.5	43	16.0	1.6	4	19
25	124	89.0	51	18.0	1.6	4	19
32	133	98.5	63.5	19.1	1.6	4	19
40	156	114.5	73	21.0	1.6	4	22

Spare parts

No.	Name	Valve	YL-1211-15*	YL-1211-20*	YL-1211-25*	YL-1211-32*	YL-1211-40*
1	Body		Y-21115 - 01 *	Y-21120 - 01 *	Y-21125 - 01 *	Y-21132 - 01 *	Y-21140 - 01 *
2	Guide cover		Y-21115 - 02	Y-21120 - 02	Y-21125 - 02	Y-21132 - 02	Y-21140 - 02
3	Stem		Y-21115 - 03	Y-21120 - 03	Y-21125 - 03	Y-21132 - 03	Y-21140 - 03
4	Guide plug		Y-21115 - 04	Y-21120 - 04	Y-21125 - 04	Y-21132 - 04	Y-21140 - 04
5	Guide washer		Y-21115 - 05	Y-21120 - 05	Y-21125 - 05	Y-21132 - 05	Y-21140 - 05
6	Gasket		Y-21115 - 06	Y-21120 - 06	Y-21125 - 06	Y-21132 - 06	Y-21140 - 06
7	U-nut		Y-21115 - 07	Y-21120 - 07	Y-21125 - 07	Y-21132 - 07	Y-21140 - 07
8	Gasket		Y-21115 - 08	Y-21120 - 08	Y-21125 - 08	Y-21132 - 08	Y-21140 - 08
9	Plug		Y-21115 - 09	Y-21120 - 09	Y-21125 - 09	Y-21132 - 09	Y-21140 - 09

\* please complete: A = ANSI flange, D = DINI flange, J = JIS flange